




PROJECTOR LIFT

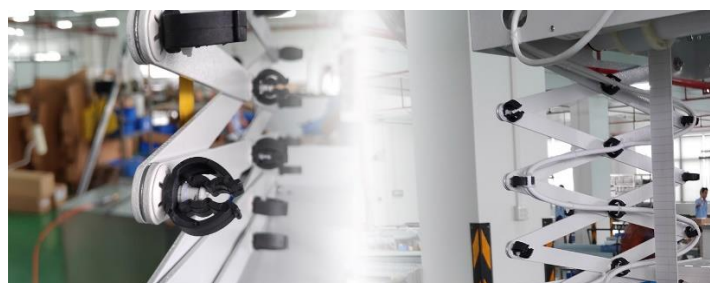

With Cable Clips

The innovative projector lift accommodates most projectors. It is widely used in conference rooms, boardrooms, hotels, etc. Control: In-line switch control is standard. IR/RF/Combined IR+RF remote available.

Equipped with a quality tubular motor that enables a maximum loading capacity of 25kg. The cable clips on the left scissor keep the projector cables tidy. 3-group aluminium scissors and belt design keeps the lift running smoothly. New designed, user-friendly universal ceiling mount base compatible with most projector mounts. Ceiling Closure Panel: Universal and elegant steel ceiling closure powder-coated in white.

Technical Specifications

Model	Plate Dimensions (Closed) (L x W x H) mm	Loading Capacity (kg)	Extending Height (mm)	Packaging Dimension (L x W x H) mm	Net Weight (kg)	Ceiling Closure Dimensions (L x W) mm	Ceiling Opening Dimensions (L x W) mm	Ceiling Closure Packing Dimensions (L x W x H) mm	Manu Model #	Soltec h Code
T100B	508 x 508 x 145	25Kg	1000	635 x 585 x 245	17.5	600 x 600	550 x 550	625 x 625 x 100	JK-T100B Lift	T100B
S180	700 x 508 x 220	50Kg	1800	770 x 640 x 380	25.5	870 x 600	820 x 550	900 x 630 x 100	JK-S180 Lift	S180

JHB

011-789 9549
brite@soltech.co.za
www.soltech.co.za

CPT

021-683-0377
capsol@soltech.co.za

SOLUTION[®]
TECHNOLOGIES



SPECIALIST AUDIOVISUAL DISTRIBUTOR